

# X-AIR V400

Smart Wall-mounted Heat Recovery Unit

# OXYGEN

## Just like breathing

Next generation ventilation units easy to install, easy to use.

86.2 % heat recovery

Suitable up to 200 m<sup>2</sup>

Easy to replace filters

Easy to install

ByPass



Cabinet compatible

Lightweight & robust

Boost, fire alarm, away

Integrated adaptive pre-heater

Unique energy-saving algorithm

Energy recovered by

# core



Compact design



Easy to install



Smart management



Comfort & Well-being



Energy efficient



EcoDesign compliant



Best quality



## Intelligence that helps you breathe easier

Forget complicated buttons – simply control your OXYGEN heat recovery unit with the smartphone app or a modern, color touchscreen LCD control panel.

## 1 unit = 1 tree



We plant a tree in the OXYGEN forest for every heat recovery unit purchased. We take care of the trees so they take care of fresh air for us.

# X-AIR V400

## Technical specification


# OXYGEN

Specific energy consumption (SEC), SEC class		A
Cold climate	kWh/m <sup>2</sup> .a	-78.6
Average climate	kWh/m <sup>2</sup> .a	-41.3
Warm climate	kWh/m <sup>2</sup> .a	-17.3
Declared typology		Bi-directional, residential ventilation
Type of drive installed or intended to be		Variable speed drive
Type of heat recovery system		Recuperative
Thermal efficiency of heat recovery	%	86.2
Maximum flow rate	m <sup>3</sup> /h	400
Electric power input of the fan drive, including	W	167
Sound power level (LWA)	dB	51
Reference flow rate	m <sup>3</sup> /s	0.078
Reference pressure difference	Pa	50
Specific power input (SPI)	W/(m <sup>3</sup> /h)	0.22
Control factor		0.65
Control typology		Local demand control
Declared maximum leakage rate:		
Internal	%	1.18
External	%	1.14
The annual electricity consumption (AEC)	kWh/m <sup>2</sup> .a	1.2
The annual heating saved (AHS)		
Cold climate	kWh/m <sup>2</sup> .a	90.3
Average climate	kWh/m <sup>2</sup> .a	46.1
Warm climate	kWh/m <sup>2</sup> .a	20.9
Power supply		230V, 50Hz, 5A
Dimensions	mm	750 x 677 x 492
Weight	kg	32

### Compliance and standards

2009/125/EB: ES 1253/2014, ES 1254/2014, ES 2017/1369, EN 13141-7:2010; 2010/30/ES: ES 1254/2014; 2011/65/ES: EN 50581(2012); 2014/35/ES: EN 60335-1:2012, EN 60335-1:2012/A11:2014.

Performance curves

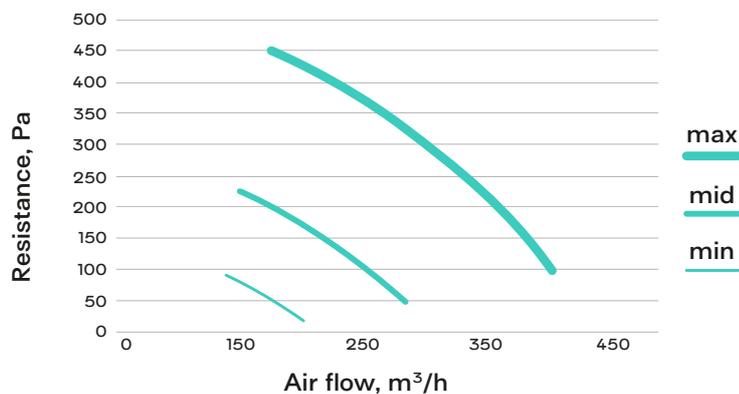

OXYGEN X-Air V400



ENERGIA - ENERGIJA - ENERGIJA - ENERGIJA - ENERGIJA - ENERGIJA - ENERGIJA  
2015 1254/2014